



RESIDENTIAL AIR CONDITIONERS X-DELUXE INVERTER (KU)



OUTDOOR



CU-RU9AKH



CU-RU12AKH



CU-RU18AKH-B
CU-RU24AKH



CU-RU28AKH



X-DELUXE INVERTER




QUALITY AIR FOR LIFE

AIR PURIFICATION

Better Indoor Air Quality

nanoe™ X effectively reduces odours and inhibits pollutants in the air and on surfaces, as well as moisturising your skin & hair. Activate nanoe™ X around the clock for safer and healthier indoor air.



nanoe™ X effectively inhibits **ADHERED & AIRBORNE POLLUTANTS***



*1 Scan here to learn more

nanoe™ X
Generator Mark2

7 Effects of nanoe™ X

Inhibits 5 Types of Pollutants					Deodorises	Moisturises
Bacteria & Viruses	Mould	Allergens	Pollen	Hazardous Substances	Odours	Skin & Hair

Provide Fresh and Clean Air to the Room

Inside cleaning works inside of an indoor unit by removing moisture, and releases nanoe™ X to inhibit bacteria and viruses, while the improved anti-dust cross flow fan prevents dust adherence for better performance.

INSIDE CLEANING
ON DEMAND

** Testing Organisation: Proteceta.Ltd • Test subject: Bacteria (Escherichia coli NBRC3301) and Virus (Escherichia coli Phage QB NBRC20012) • Tested time: 2.5 hours • Test Result: 99% inhibited (compared to non-operation) • Test Report No: PR190803 (Filter & Evaporator); PR191102 (Air Outlet)

99%*
INHIBITED

Bacteria **Virus**
on evaporator, filter & air outlet

ANTI-DUST
CROSS FLOW FAN

PM2.5 REMOVAL

Remove Dust Particles (PM2.5)

nanoe-G effectively removes 99%*³ of dust particles by releasing negative ions to capture dust particles sized as small as PM2.5, carrying them back to the filter to deliver a clean space.



*³ • Testing Organisation: FCG Research Institute, Inc. • Test Subject: Cigarette smoke (as PM2.5)
• Test Volume: 23m³ • Test Result: Removed by 99% [compared to the initial concentration]
• Test Report No: 25034

CONNECTIVITY

Connect & Control Your AC Conveniently Anywhere, Anytime

Control multiple air conditioners with built-in Wi-Fi in one or multiple locations with just one device when you are home or away.

Comfort Cloud App

BUILT-IN EASY CONNECT

SMART CONTROL
Connect to multiple units in multiple locations

SMART EFFICIENCY
Monitor and compare energy consumption

SMART ASSIST
Receive error notifications

SMART COMFORT
Remotely access all AC features

EFFICIENCY

Powerful Performance with Efficiency

Panasonic's Inverter air conditioners integrate DC motor to offer better performance in terms of greater energy savings, better comfort and quiet operation. Inverter technology minimises temperature fluctuation to save energy without compromising comfort.

CONSUME 52%*⁴ LESS ENERGY

UP TO 20%*
ENERGY SAVING
with **Ai ECO**

Energy Saving
Comfort

Intelligently balances energy savings and comfort

ECO mode with A.I. Control intelligently learns and judges based on room condition and heat source to optimise energy savings and comfort level.

*¹ Comparison of ECO mode & normal mode by using 1.5HP Inverter model.

Benefits of Panasonic Inverter vs Non-Inverter

Save On Electricity Bill

Panasonic's Inverter air conditioners are able to precisely control the temperature to provide better efficiency with optimum performance, saving you money in the long run.

Better Comfort

Varying the speed of compressor according to temperature changes to minimise fluctuations in temperature, so you can enjoy total cooling comfort while saving energy.

Quiet Operation

Smooth operation and noise level as low as 19dB(A)*.

*⁴ 52% energy saving result only applicable to 2.5HP X-DELUXE INVERTER. Comparison with lowest 2-star product.

** 19dB(A) noise level only applicable to 1.0HP X-DELUXE INVERTER.

COMFORT

POWERFUL



UP TO 18%*
FASTER COOLING

Instant Powerful Cooling

POWERFUL mode cools your room faster by 18%*⁷ during start-up to bring you cooling comfort instantly on a hot day.

*⁷ Comparison of POWERFUL mode & normal cool mode by using 1.5HP Inverter model.

AEROWINGS

Sub-Flap
Compresses and concentrates cool air

Outer Flap
Helps to deliver airflow further



Comfort Cooling Environment

AEROWINGS delivers cooling comfort across the room by concentrating cool air, delivering faster and further airflow using 2 flaps.

DURABILITY




BLUE FIN CONDENSER
COPPER TUBE CONDENSER

Durable Outdoor Units


Panasonic's outdoor units are equipped with Blue Fin and Copper Tube condenser, a corrosion resistant outdoor coating, plus water resistant printed circuit board for protection against corrosion and different conditions.



X-DELUXE *INVERTER* Single-Split Type

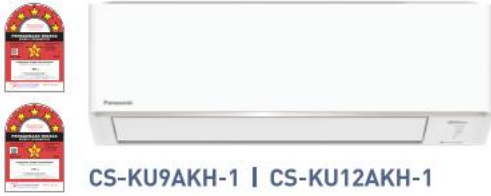

CS-KU9AKH-1 | CS-KU12AKH-1

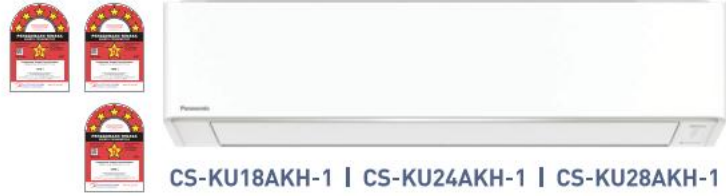

CS-KU18AKH-1 | CS-KU24AKH-1 | CS-KU28AKH-1



Wireless
(Standard)



Wired
CZ-RD514C
(Optional)



Wireless
(Standard)



Wired
CZ-RD514C
(Optional)



MODEL	INDOOR UNIT (50Hz)		CS-KU9AKH-1	CS-KU12AKH-1	CS-KU18AKH-1	CS-KU24AKH-1	CS-KU28AKH-1
	OUTDOOR UNIT		CU-RU9AKH	CU-RU12AKH	CU-RU18AKH-B	CU-RU24AKH	CU-RU28AKH
Cooling Capacity	[min-max]	kW	2.65 (0.90-3.40)	3.52 (1.02-4.10)	5.30 (1.10-6.00)	6.25 (1.12-7.18)	7.10 (1.25-8.50)
	[min-max]	Btu/h	9,040 (3,070-11,600)	12,000 (3,480-14,000)	18,100 (3,750-20,500)	21,300 (3,820-24,500)	24,200 (4,260-29,000)
EER	[min-max]	Btu/hW	12.05 (13.64-11.26)	11.65 (12.65-11.11)	11.24 (12.93-11.20)	11.83 (15.28-11.78)	12.10 (12.17-10.74)
	[min-max]	W/W	3.53 (4.00-3.30)	3.42 (3.71-3.25)	3.29 (3.79-3.28)	3.47 (4.48-3.45)	3.55 (3.57-3.15)
CSPF		W/W	5.57 [5★]	5.41 [5★]	5.91 [5★]	5.99 [5★]	6.02 [5★]
Electrical Data	Voltage	V	220-240	220-240	220-240	220-240	220-240
	Current	A	3.70-3.40	4.80-4.40	7.40-6.80	8.30-7.60	9.20-8.40
	Power Input [min-max]	W	750 [225-1,030]	1,030 [275-1,260]	1,610 [290-1,830]	1,800 [250-2,080]	2,000 [350-2,700]
Moisture Removal		L/h	1.6	2.0	2.9	3.5	4.1
		Pt/h	3.4	4.2	6.1	7.4	8.7
Air Circulation	Indoor	m ² /min (ft ² /min)	10.3 (365)	11.0 (390)	19.3 (680)	19.9 (700)	21.0 (740)
	Outdoor	m ² /min (ft ² /min)	26.7 (940)	30.6 (1,080)	39.3 (1,390)	34.9 (1,230)	45.9 (1,620)
Noise Level	Indoor (H / L / Q-Lo)	dB (A)	38/26/19	40/26/21	44/32/27	45/34/29	47/37/34
	Outdoor (H)	dB (A)	47	48	50	51	53
Dimensions Indoor (Outdoor)	Height	mm	290 (511)	290 (542)	295 (619)	295 (619)	295 (695)
		inch	11-7/16 (20-1/8)	11-7/16 (21-11/32)	11-5/8 (24-3/8)	11-5/8 (24-3/8)	11-5/8 (27-3/8)
	Width	mm	765 (650)	765 (780)	1,060 (824)	1,060 (824)	1,060 (875)
		inch	30-1/8 (25-19/32)	30-1/8 (30-23/32)	41-3/4 (32-15/32)	41-3/4 (32-15/32)	41-3/4 (34-15/32)
	Depth	mm	214 (230)	214 (289)	249 (299)	249 (299)	249 (320)
		inch	8-7/16 (9-1/16)	8-7/16 (11-13/32)	9-13/16 (11-25/32)	9-13/16 (11-25/32)	9-13/16 (12-5/8)
Net Weight	Indoor	kg (lb)	8 (18)	8 (18)	12 (26)	12 (26)	13 (29)
	Outdoor	kg (lb)	18 (40)	22 (49)	29 (64)	32 (71)	43 (95)
Refrigerant Pipe Diameter	Liquid Side	mm	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35
		inch	1/4	1/4	1/4	1/4	1/4
	Gas Side	mm	ø 9.52	ø 9.52	ø 12.70	ø 12.70	ø 15.88
		inch	3/8	3/8	1/2	1/2	5/8
Pipe Extension	Chargeless Pipe Length	m	7.5	7.5	10.0	10.0	10.0
	Maximum Pipe Length	m	20	20	30	30	30
	Maximum Elevation Length	m	15	15	20	20	20
	Additional Refrigerant Gas*	g/m	10	10	15	15	25
Power Supply			Indoor	Indoor	Indoor	Indoor	Outdoor

*When pipes are not extended from the chargeless pipe length, the required amount of refrigerant is already in the unit.

OUTDOOR UNIT

BLUE FIN
CONDENSER

R32
REFRIGERANT



CU-RU9AKH



CU-RU12AKH



CU-RU18AKH-B
CU-RU24AKH



CU-RU28AKH

Panasonic®

- Please read the Installation Instructions carefully before installing the unit, and the Operating Instructions before using it.
- Specifications are subject to change without prior notice.
- The contents of this catalogue are accurate as of March 2024.
- Due to printing considerations, actual colours may vary slightly from those shown.
- All graphics are provided solely for the purpose of illustrating a point.



Do not add or replace refrigerant other than the specified type. Manufacturer is not responsible for damage or deterioration in safety due to usage of other refrigerant.

Authorised Dealer

Panasonic Air-Conditioning Malaysia (PACMY)
A Division Company of Panasonic Malaysia Sdn. Bhd.

Registration No. 197601000977 (26975-W)



Customer Care Center

Lot 10, Jalan 13/2, 46200 Petaling Jaya,
Selangor Darul Ehsan.
Tel: +603-7932 4189 Fax: +603-7932 4181
Email: aircon.cs@my.panasonic.com
Website: www.panasonic.com.my